


AL 4065 LED

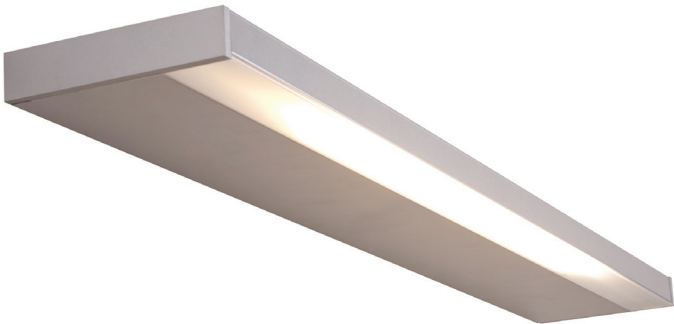

Colour(s)

WALL MOUNTED LED

- Wall mounted luminaire with direct and indirect lighting for Linear LED module, maximum 6 360 lumens
- CRI of 80
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K and 4 000 K
- Up to 50 000 hours lamp life (L80B50)
- Luminous efficiency of system up to 135 lm/W
- Direct lighting diffuser made of satiny polycarbonate
- Indirect lighting diffuser made of clear polycarbonate
- Reflector made of MIRO 20 Silver® aluminium
- Profile made of painted aluminium
- Static heat sink
- **Weight:** approx. 4,5 kg (1050 mm), 6 kg (1300 mm)
- **Power/ Number of Feet(s):** 2 FTs for direct lighting, 3 FTs or 4 FTs for indirect lighting
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)

Driver(s)

FIXED

C
DIMM
DALI

Standards

Class I | IP 20 | 650°

Efficiency energy class

A++

Beam(s)

Dimensions

1 050 mm / 1 300 mm

34 mm

165 mm

ITEM	TYPE	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
AL 4065-LED 4500-830	General lighting	31,5 W (3 Ft)	36 W	4770 lumens	132,5 lm/W	3000 K	80
AL 4065-LED 4500-840	General lighting	31,5 W (3 Ft)	36 W	4770 lumens	132,5 lm/W	4000 K	80
AL 4065-LED 6000-830	General lighting	42 W (4 Ft)	47,1 W	6360 lumens	135 lm/W	3000 K	80
AL 4065-LED 6000-840	General lighting	42 W (4 Ft)	47,1 W	6360 lumens	135 lm/W	4000 K	80
AL 4065-LED 1630-830	Reading lighting	11,8 W (2 Ft)	14,8 W	1733 lumens	117 lm/W	3000 K	80
AL 4065-LED 1630-840	Reading lighting	11,8 W (2 Ft)	14,8 W	1733 lumens	117 lm/W	4000 K	80
AL 4065-LED 350-830	Night lighting	3,2 W	5,2 W	350 lumens	67,5 lm/W	3000 K	80