

LE 5046 LED

- » Lighting system for LINEAR LED module, maximum 2 894 lumens

» High quality of light with a CRI higher than 80

» Available in 3 000 K

» 50 000 hours lamp life (L80B20)

» Luminous efficiency of system to 130,2 lm/W


» Housing made of painted steel

» Cluster optical with lens, made of polycarbonate (PC)

» Optical compartment protected against shocks and dust
- » **Colour(s):** Black (BK)

» **Driver(s):** Fixed (C Fixed), Dimmable driver DALI (CDIMMDALI)

» **Option:** Asymmetric (ASY)

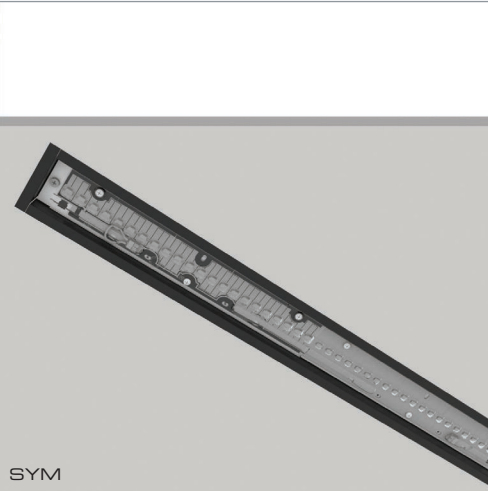

SYM

Driver(s)



Light distribution




Colour(s)



Standards


Classe I | IP20 | 650° | IK10

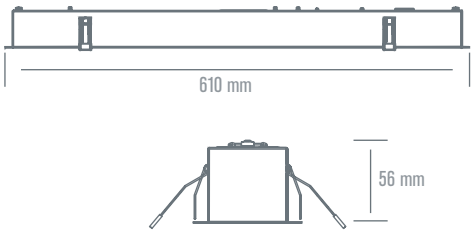

LINEAR LED MODULE

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR T °	CRI
LE 5046 LED 3000-830	20W	22,2W	2894 lumens	130,2 lm/W	3000 K	80

OPTION

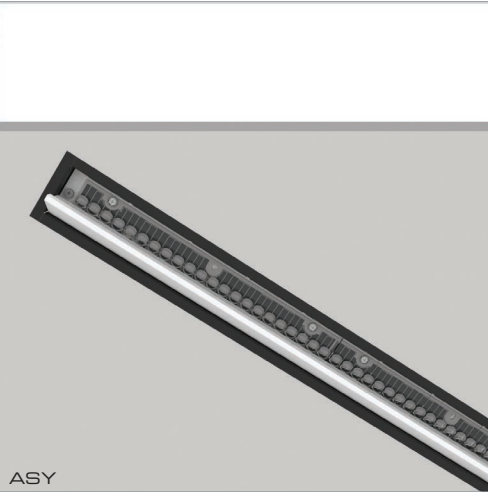

ASY

