


ET 5029 LED CELLAR

 Luminaire meeting the requirements of the amber luminaire qualification protocol for the storage of bottles of the Comité Champagne

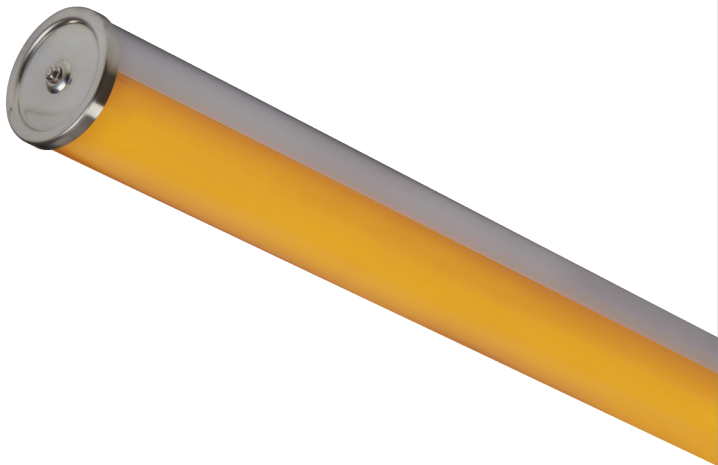

Colour(s)


LUMINAIRES FREE OF UV AND IR

- Waterproof IP 65 ceiling mounted luminaire for linear LED module, maximum 3499 lumens
- MacAdam Ellipse: 3 SDCM
- 50 000 hours lamp life
- Luminous efficiency of system up to 77,5 lm/W
- Opal diffuser made of polycarbonate extruded (DO)
- Clips and endcap made of stainless steel
- LED of power with ceramic housing, aluminum substrate
- Neutral diffuser which doesn't modify the light spectrum
- Possible maintenance thanks to the replacement of the light source
- Static heat sink
- **Weight:** Approx. 2,6 kg
- **Number of modules:** 1
- **Driver(s) :** Fixed, Dimmable driver DALI (CDIMMDALI)

Driver(s)



Standards

Class I | IP 65 | 850° | IK 8



Beam(s)



Efficiency energy class


A

Dimensions




ITEM	LENGTH	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	BIN LED
ET 5029 LED-900	300 mm	12,7W	874 lumens	69 lm/W	Amber	bin B30 : 596 nano
ET 5029 LED-1800	600 mm	22,8W	1749 lumens	76,5 lm/W	Amber	bin B30 : 596 nano
ET 5029 LED-3500	1200 mm	45,1W	3499 lumens	77,5 lm/W	Amber	bin B30 : 596 nano

Spectral distribution

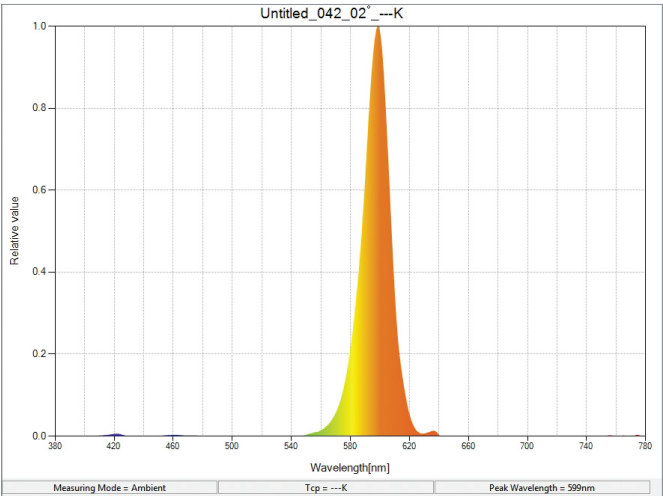


LIGHT DISTRIBUTION

Length: 300 mm

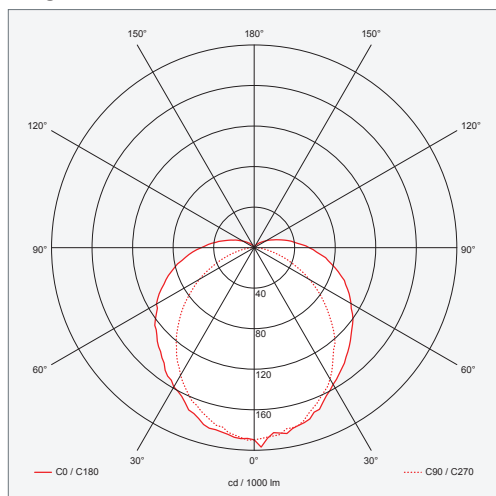

Length: 600 mm

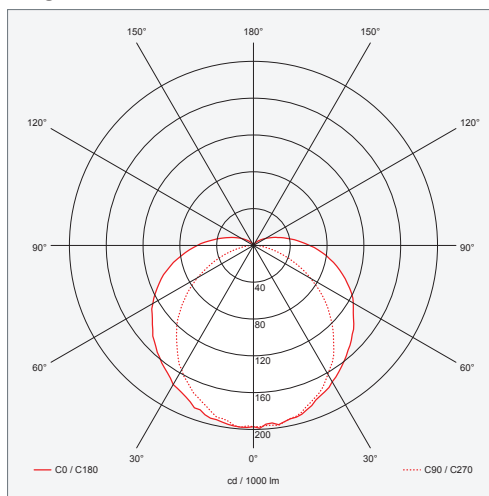

Length: 1200 mm

