

PR 2047-A LED

- » Orientable projector for LED SPOT module, maximum 7 200 lumens
- » High quality of light with a CRI up to 90
- » Available in 3 000 K and 4 000 K
- » 50 000 hours lamp life (L80B50)
- » Luminous efficiency of system up to 134 lm/W
- » 3-circuits track adaptor
- » Housing and box made of painted steel
- » Static heat sink
- » Optical protection clear glass

- » **Adjustable:** 90° and Turnable: 360°
- » **Colour(s):** White (WH), Grey (GR), Black (BK)
- » **Driver(s):** Fixed (C Fixed), Dimmable driver DALI (CDIMMDALI)
- » **Option(s) :** Colour filters (FIL)



Driver(s)

C FIXED **C** DIMM DALI

Beam(s)

20° 40° 60°
10° 30° 50°

Colour(s)


WH GR BK

Standards

Class I | IP 20 | 650°

Efficiency energy class

A+

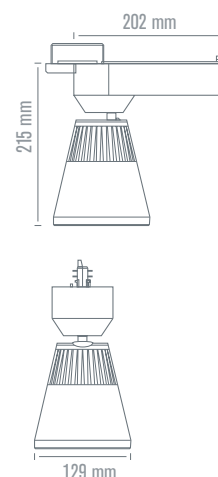

LED SPOT MODULE

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR T°	CRI	BEAM
PR 2047-A LED LED 3000-930	24W	28W	3050 lumens	109 lm/W	3000 K	90	A
PR 2047-A LED LED 3000-940	24W	28W	3350 lumens	119,5 lm/W	4000 K	90	A
PR 2047-A LED LED 4000-930	31W	34W	3850 lumens	113 lm/W	3000 K	90	A
PR 2047-A LED LED 4000-940	31W	34W	4150 lumens	122 lm/W	4000 K	90	A
PR 2047-A LED LED 3500-830	25W	28W	3600 lumens	128,5 lm/W	3000 K	80	B
PR 2047-A LED LED 3500-840	25W	28W	3750 lumens	134 lm/W	4000 K	80	B
PR 2047-A LED LED 4000-830	32,5W	31W	4060 lumens	125 lm/W	3000 K	80	B
PR 2047-A LED LED 4000-840	32,5W	31W	4180 lumens	128,5 lm/W	4000 K	80	B
PR 2047-A LED LED 5000-830	39W	43W	4950 lumens	115 lm/W	3000 K	80	B
PR 2047-A LED LED 5000-840	39W	43W	5100 lumens	118,5 lm/W	4000 K	80	B
PR 2047-A LED LED 7000-830	50W	55W	7000 lumens	127,5 lm/W	3000 K	80	A
PR 2047-A LED LED 7000-840	50W	55W	7200 lumens	131 lm/W	4000 K	80	A

OPTION(S)



FIL