

LS 3976 ASY LED



Colour(s)



Light distribution



ASY

SUSPENDED LUMINAIRES ■ LED

- Asymmetrical track suspended luminaire for LINEAR LED module, maximum 12 750 lumens
- CRI of 80
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K and 4 000 K
- Middle flux module 100 000 hours lamp life (L80B10), 50 000h (L90B10)
- High flux module 100 000 hours lamp life (L90B10)
- Luminous efficiency of system up to 186,5 lm/W
- 3 circuits track adaptor
- Housing made of prelacquered steel
- Cluster optical with lens, made of polycarbonate (PC) reflector made of Miro Silver available in Miro 8 (M8) or Miro 20 (M20) quality optical protector made of painted steel
- Endcaps made of injected polycarbonate
- Static heat sink
- Optical compartment protected against shocks and dust
- **Weight** : Approx. 3 kg (1225 mm), 4,5 kg (1775 mm)
- **Standard length** : 1 225 or 1 775 mm
- **Driver(s)** : Fixed, Dimmable DALI (CDIMMDALI), Casambi, Connect
- **Photobiological risk group 0**
- ENEC-labelled module and converter
- Red rendering (R9) : R9>50 (High flux), R9>0 (Middle flux)


Driver(s)



Standards

Class I | IP 20 | 650° | IK 10 | RG0

Dimensions

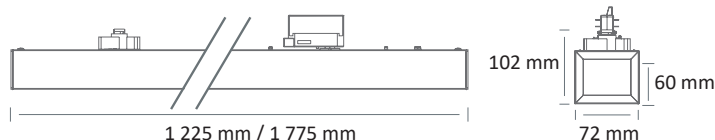

LS 3976 ASY LED

■ PERFORMANCES OF THE COMPONENTS HIGH FLUX

ITEM	NB OF MODULE(S)	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 3976 ASY LED H 4600 HE-830	2	26,5 W	4640 lumens	175 lm/W	3000 K	80	C
LS 3976 ASY LED H 4600 HE-840	2	26,5 W	4740 lumens	178,7 lm/W	4000 K	80	C
LS 3976 ASY LED H 6600 HE-830	3	38,1 W	6960 lumens	182,6 lm/W	3000 K	80	C
LS 3976 ASY LED H 6600 HE-840	3	38,1 W	7110 lumens	186,5 lm/W	4000 K	80	C
LS 3976 ASY LED H 7000-830	2	40,8 W	7100 lumens	173,6 lm/W	3000 K	80	C
LS 3976 ASY LED H 7000-840	2	40,8 W	7240 lumens	177 lm/W	4000 K	80	C
LS 3976 ASY LED H 8000-830	2	48,4 W	8340 lumens	172,1 lm/W	3000 K	80	C
LS 3976 ASY LED H 8000-840	2	48,4 W	8500 lumens	175,4 lm/W	4000 K	80	C
LS 3976 ASY LED H 10500-830	3	59,4 W	10650 lumens	179,1 lm/W	3000 K	80	C
LS 3976 ASY LED H 10500-840	3	59,4 W	10860 lumens	182,6 lm/W	4000 K	80	C
LS 3976 ASY LED H 12000-830	3	71,1 W	12510 lumens	175,7 lm/W	3000 K	80	C
LS 3976 ASY LED H 12000-840	3	71,1 W	12750 lumens	179,1 lm/W	4000 K	80	C

■ PERFORMANCES OF THE COMPONENTS MIDDLE FLUX

ITEM	NB OF MODULE(S)	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 3976 ASY LED M 4600-830	2	26,4 W	4480 lumens	169,2 lm/W	3000 K	80	C
LS 3976 ASY LED M 4600-840	2	26,4 W	4680 lumens	176,8 lm/W	4000 K	80	C
LS 3976 ASY LED M 6600-830	3	38 W	6750 lumens	177,5 lm/W	3000 K	80	C
LS 3976 ASY LED M 6600-840	3	38 W	7080 lumens	186,2 lm/W	4000 K	80	C
LS 3976 ASY LED M 7000 HO-830	2	40,8 W	6840 lumens	167,6 lm/W	3000 K	80	C
LS 3976 ASY LED M 7000 HO-840	2	40,8 W	7160 lumens	175,4 lm/W	4000 K	80	C
LS 3976 ASY LED M 8500-830	3	48,8 W	8490 lumens	173,9 lm/W	3000 K	80	C
LS 3976 ASY LED M 8500-840	3	48,8 W	8880 lumens	181,9 lm/W	4000 K	80	C
LS 3976 ASY LED M 10500 HO-830	3	59,7 W	10260 lumens	171,7 lm/W	3000 K	80	C
LS 3976 ASY LED M 10500 HO-840	3	59,7 W	10740 lumens	179,7 lm/W	4000 K	80	C