


■ LS 2465 LED



Colour(s)

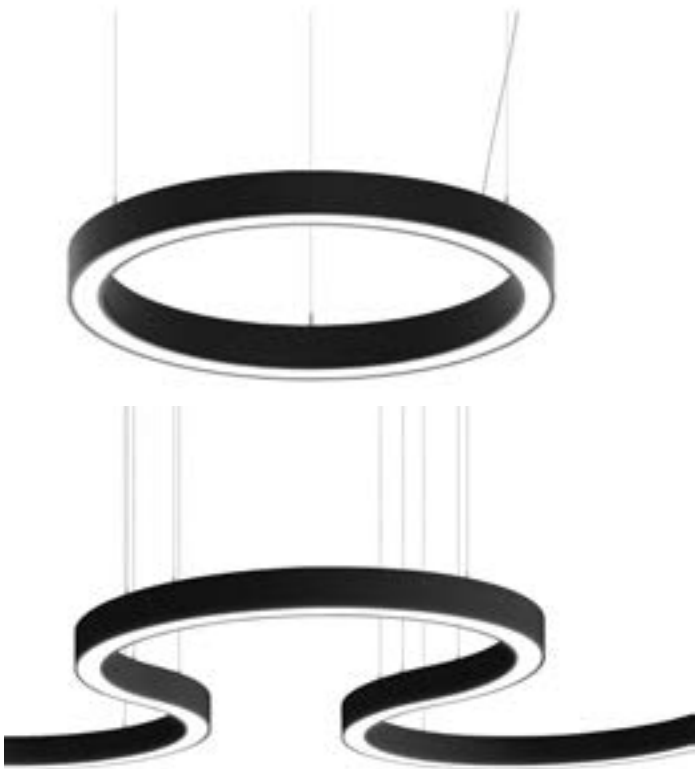

SUSPENDED LUMINAIRES ■ LED

- Suspended luminaire for LED module, maximum 12 285 lumens
- CRI of 80
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K and 4 000 K
- 80 000 hours lamp life (L90B10)
- Luminous efficiency of system up to 109 lm/W
- Housing made of extruded aluminium profile
- Opal polycarbonate diffuser
- **Weight** : Approx. 5,8 kg (600 mm), 9 kg (900 mm), 12,2 kg (1200 mm), 15 kg (1500 mm)
- **Driver(s)** : Fixed, Dimmable DALI (CDIMMDALI)
- **Option(s)** : Transparent power cable, suspension, micro-prismatic diffuser, junction kit, piton cover, version with indirect lighting

Driver(s)




Standards

Class I | IP 20 | 650°

Beam(s)




Dimensions

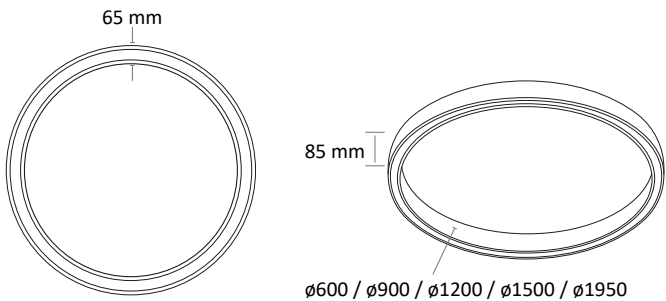

ITEM	DIMENSIONS IN MM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 2465 LED 4000-830	ø600x65x85	38 W	3823 lumens	101 lm/W	3 000 K	80	B
LS 2465 LED 4000-840	ø600x65x85	38 W	3993 lumens	105 lm/W	4 000 K	80	B
LS 2465 LED 5000-830	ø900x65x85	54 W	5522 lumens	102 lm/W	3 000 K	80	B
LS 2465 LED 5000-840	ø900x65x85	54 W	5768 lumens	107 lm/W	4 000 K	80	B
LS 2465 LED 8000-830	ø1200x65x85	77 W	8071 lumens	105 lm/W	3 000 K	80	B
LS 2465 LED 8000-840	ø1200x65x85	77 W	8430 lumens	109 lm/W	4 000 K	80	B
LS 2465 LED 9000-830	ø1500x65x85	91 W	9346 lumens	103 lm/W	3 000 K	80	B
LS 2465 LED 9000-840	ø1500x65x85	91 W	9761 lumens	107 lm/W	4 000 K	80	B
LS 2465 LED 12000-840	ø1950x65x85	116 W	12285 lumens	105,9 lm/W	4 000 K	80	B

Accessories




■ **LS 2465 LED**


Module(s)




1/2




1/4



1/8



1/16



Straight

