



EO 5084-1 LED TRIM SQUARE




130 x 130 

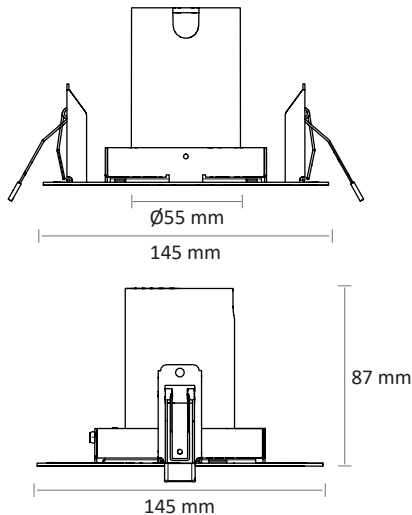

EO 5084-2 LED TRIM SQUARE

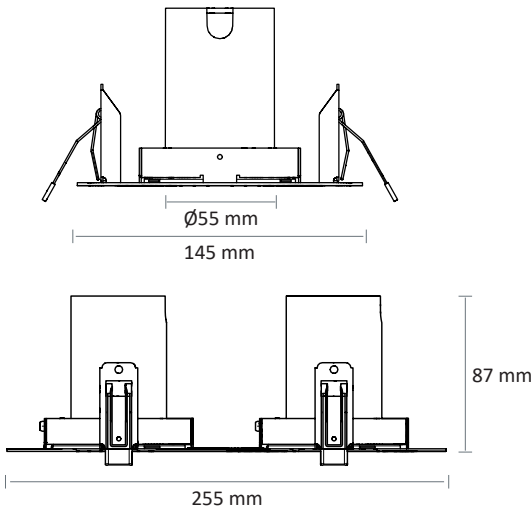


240 x 130 

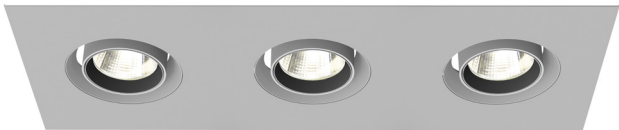

Colour(s)



EO 5084-3 LED TRIM SQUARE

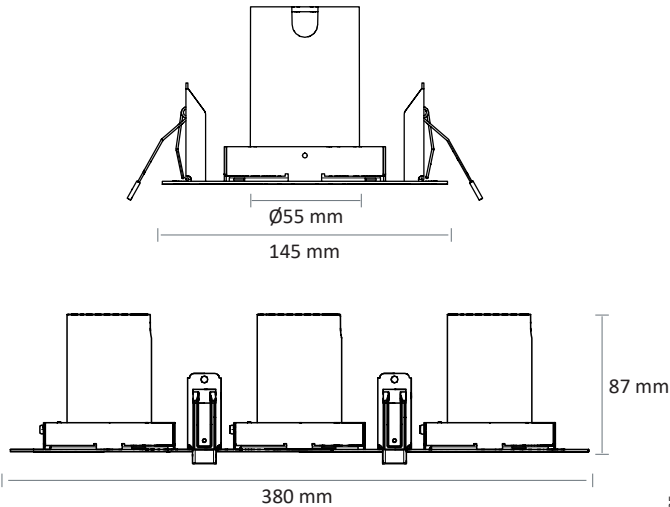

365 x 130 

EO 5084-123 LED TRIM SQUARE

- Recessed orientable spotlight simple, double or triple, for module LED SPOT, maximum 3x1 498 lumens
- CRI of 95
- MacAdam Ellipse : 2 SDCM
- Available in 3 000 K, 3 500 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 99 lm/W
- Springs in pressure for easier installation
- Ring made of die-cast aluminium
- Static heat sink
- **Weight** : Approx. 1 kg
- **Driver(s)** : Fixe, Dimmable DALI (CDIMMDALI)
- **Option(s)** : Elliptical optic, honeycomb

Driver(s)



Standards

Class II | IP 20 | 650°

Beam(s)



See table

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	BEAMS	EFFICIENCY ENERGY CLASS
EO 5084-1 LED 600-930	8,7 W	600 lumens	68,6 lm/W	3000 K	95	11°	F
EO 5084-1 LED 600-935	8,7 W	600 lumens	68,6 lm/W	3500 K	95	11°	F
EO 5084-1 LED 650-940	8,7 W	663 lumens	75,8 lm/W	4000 K	95	11°	E
EO 5084-1 LED 700-930	11,2 W	717 lumens	63,7 lm/W	3000 K	95	11°	F
EO 5084-1 LED 700-935	11,2 W	717 lumens	63,7 lm/W	3500 K	95	11°	F
EO 5084-1 LED 800-940	11,2 W	793 lumens	70,5 lm/W	4000 K	95	11°	E
EO 5084-1 LED 900-930	15 W	893 lumens	59,3 lm/W	3000 K	95	11°	F
EO 5084-1 LED 900-935	15 W	893 lumens	59,3 lm/W	3500 K	95	11°	F
EO 5084-1 LED 1000-940	15 W	987 lumens	65,5 lm/W	4000 K	95	11°	E
EO 5084-1 LED 800-930	8,6 W	787 lumens	91,2 lm/W	3000 K	95	15°/25°/35°	E
EO 5084-1 LED 800-935	8,6 W	828 lumens	96 lm/W	3500 K	95	15°/25°/35°	D
EO 5084-1 LED 850-940	8,6 W	854 lumens	99 lm/W	4000 K	95	15°/25°/35°	D
EO 5084-1 LED 950-930	11 W	965 lumens	87,7 lm/W	3000 K	95	15°/25°/35°	E
EO 5084-1 LED 1000-935	11 W	1015 lumens	92,3 lm/W	3500 K	95	15°/25°/35°	D
EO 5084-1 LED 1050-940	11 W	1047 lumens	95,2 lm/W	4000 K	95	15°/25°/35°	D
EO 5084-1 LED 1250-930	16 W	1248 lumens	78 lm/W	3000 K	95	15°/25°/35°	E
EO 5084-1 LED 1300-935	16 W	1312 lumens	82 lm/W	3500 K	95	15°/25°/35°	D
EO 5084-1 LED 1350-940	16 W	1354 lumens	84,6 lm/W	4000 K	95	15°/25°/35°	D
EO 5084-1 LED 1400-930	17,1 W	1381 lumens	80,6 lm/W	3000 K	95	15°/25°/35°	E
EO 5084-1 LED 1450-935	17,1 W	1452 lumens	84,8 lm/W	3500 K	95	15°/25°/35°	D
EO 5084-1 LED 1500-940	17,1 W	1498 lumens	87,5 lm/W	4000 K	95	15°/25°/35°	D
EO 5084-2 LED 600-930	2x8,7 W	2x600 lumens	68,6 lm/W	3000 K	95	11°	F
EO 5084-2 LED 600-935	2x8,7 W	2x600 lumens	68,6 lm/W	3500 K	95	11°	F
EO 5084-2 LED 650-940	2x8,7 W	2x663 lumens	75,8 lm/W	4000 K	95	11°	E
EO 5084-2 LED 700-930	2x11,2 W	2x717 lumens	63,7 lm/W	3000 K	95	11°	F
EO 5084-2 LED 700-935	2x11,2 W	2x717 lumens	63,7 lm/W	3500 K	95	11°	F
EO 5084-2 LED 800-940	2x11,2 W	2x793 lumens	70,5 lm/W	4000 K	95	11°	E
EO 5084-2 LED 900-930	2x15 W	2x893 lumens	59,3 lm/W	3000 K	95	11°	F
EO 5084-2 LED 900-935	2x15 W	2x893 lumens	59,3 lm/W	3500 K	95	11°	F
EO 5084-2 LED 1000-940	2x15 W	2x987 lumens	65,5 lm/W	4000 K	95	11°	E
EO 5084-2 LED 800-930	2x8,6 W	2x787 lumens	91,2 lm/W	3000 K	95	15°/25°/35°	E
EO 5084-2 LED 800-935	2x8,6 W	2x828 lumens	96 lm/W	3500 K	95	15°/25°/35°	D
EO 5084-2 LED 850-940	2x8,6 W	2x854 lumens	99 lm/W	4000 K	95	15°/25°/35°	D
EO 5084-2 LED 950-930	2x11 W	2x965 lumens	87,7 lm/W	3000 K	95	15°/25°/35°	E
EO 5084-2 LED 1000-935	2x11 W	2x1015 lumens	92,3 lm/W	3500 K	95	15°/25°/35°	D
EO 5084-2 LED 1050-940	2x11 W	2x1047 lumens	95,2 lm/W	4000 K	95	15°/25°/35°	D
EO 5084-2 LED 1250-930	2x16 W	2x1248 lumens	78 lm/W	3000 K	95	15°/25°/35°	E
EO 5084-2 LED 1300-935	2x16 W	2x1312 lumens	82 lm/W	3500 K	95	15°/25°/35°	D
EO 5084-2 LED 1350-940	2x16 W	2x1354 lumens	84,6 lm/W	4000 K	95	15°/25°/35°	D
EO 5084-2 LED 1400-930	2x17,1 W	2x1381 lumens	80,6 lm/W	3000 K	95	15°/25°/35°	E
EO 5084-2 LED 1450-935	2x17,1 W	2x1452 lumens	84,8 lm/W	3500 K	95	15°/25°/35°	D
EO 5084-2 LED 1500-940	2x17,1 W	2x1498 lumens	87,5 lm/W	4000 K	95	15°/25°/35°	D

EO 5084-123 LED TRIM SQUARE

EO 5084-3 LED 600-930	3x8,7 W	3x600 lumens	68,6 lm/W	3000 K	95	11°	F
EO 5084-3 LED 600-935	3x8,7 W	3x600 lumens	68,6 lm/W	3500 K	95	11°	F
EO 5084-3 LED 650-940	3x8,7 W	3x663 lumens	75,8 lm/W	4000 K	95	11°	E
EO 5084-3 LED 700-930	3x11,2 W	3x717 lumens	63,7 lm/W	3000 K	95	11°	F
EO 5084-3 LED 700-935	3x11,2 W	3x717 lumens	63,7 lm/W	3500 K	95	11°	F
EO 5084-3 LED 800-940	3x11,2 W	3x793 lumens	70,5 lm/W	4000 K	95	11°	E
EO 5084-3 LED 900-930	3x15 W	3x893 lumens	59,3 lm/W	3000 K	95	11°	F
EO 5084-3 LED 900-935	3x15 W	3x893 lumens	59,3 lm/W	3500 K	95	11°	F
EO 5084-3 LED 1000-940	3x15 W	3x987 lumens	65,5 lm/W	4000 K	95	11°	E
EO 5084-3 LED 800-930	3x8,6 W	3x787 lumens	91,2 lm/W	3000 K	95	15°/25°/35°	E
EO 5084-3 LED 800-935	3x8,6 W	3x828 lumens	96 lm/W	3500 K	95	15°/25°/35°	D
EO 5084-3 LED 850-940	3x8,6 W	3x854 lumens	99 lm/W	4000 K	95	15°/25°/35°	D
EO 5084-3 LED 950-930	3x11 W	3x965 lumens	87,7 lm/W	3000 K	95	15°/25°/35°	E
EO 5084-3 LED 1000-935	3x11 W	3x1015 lumens	92,3 lm/W	3500 K	95	15°/25°/35°	D
EO 5084-3 LED 1050-940	3x11 W	3x1047 lumens	95,2 lm/W	4000 K	95	15°/25°/35°	D
EO 5084-3 LED 1250-930	3x16 W	3x1248 lumens	78 lm/W	3000 K	95	15°/25°/35°	E
EO 5084-3 LED 1300-935	3x16 W	3x1312 lumens	82 lm/W	3500 K	95	15°/25°/35°	D
EO 5084-3 LED 1350-940	3x16 W	3x1354 lumens	84,6 lm/W	4000 K	95	15°/25°/35°	D
EO 5084-3 LED 1400-930	3x17,1 W	3x1381 lumens	80,6 lm/W	3000 K	95	15°/25°/35°	E
EO 5084-3 LED 1450-935	3x17,1 W	3x1452 lumens	84,8 lm/W	3500 K	95	15°/25°/35°	D
EO 5084-3 LED 1500-940	3x17,1 W	3x1498 lumens	87,5 lm/W	4000 K	95	15°/25°/35°	D